




COUNTER TOP DISPENSER || ELECTRIC SUPPLY



CERTIFIED PRODUCT  
MATERIALS IN WATER CONTACT

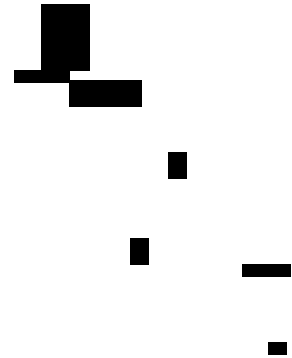

USABLE WITH:  
WATER CARE FILTERS.



USABLE ONLY  
WITH POTABLE WATER



EQUIPMENT confirmations to:  
D.M. 5/ D.M. 4/ 4

Vertical operation. MAX temperature in entry: 35 ° C.  
MAX operating pressure:3.5bar.

*ATTENTION: this equipment requires regular periodic maintenance in order to ensure the potability requirements of the treated drinking water and the maintenance of improvements as declared by the manufacturer. Do not use with microbiologically hazardous water. After periods of inactivity (3-4 weeks) carry out a thorough sanitation or replace the filter.*